

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB04/005432

International filing date: 20 December 2004 (20.12.2004)

Document type: Certified copy of priority document

Document details: Country/Office: GB
Number: 0401082.3
Filing date: 19 January 2004 (19.01.2004)

Date of receipt at the International Bureau: 17 February 2005 (17.02.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



PCT/GB2004/005432



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

AmBrewster

Dated

8 February 2005

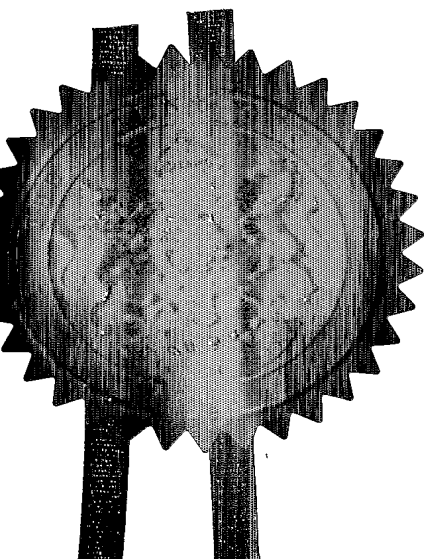



124

Patents Form 1/77

Patents Act 1977
(Rule 16)

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form).

The
Patent
Office

THE PATENT OFFICE
RM
19 JAN 2004
RECEIVED BY FAX

19JAN04 E866436-1 D02B24
P01/7700.0.00-0401082.3 ACCOUNT CHA

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your Reference

P.7280 GBA1

2. Patent application number
(The Patent Office will fill in this part)

0401082.3

11 9 JAN 2004

3. Full name, address and postcode of the or of each applicant (underline all surnames)

HOWES, Jonathan Sebastian
3 Chapel Cottages
Cowfold Road
Bolney
West Sussex RH17 5QU
G.B.

MACNAGHTEN, James
Fernleigh Cottage
3 Hill Avenue
Cambridge CB1 7UY
G.B.

87788 045001

8329751001

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention

IMPROVED KEEL

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

MAGUIRE BOSS
5 Crown Street
St. Ives
Cambridgeshire
PE27 5EB, G.B.

Patent's ADP number (if you know it)

07188725001 ✓

6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last six months

Country

Priority application number
(if you know it)

Date of filing
(day/month/year)

7. Divisionals etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note f)

Number of earlier application

Date of filing
(day/month/year)

8. Is a Patents Form 7/77 (Statement of Inventorship and of right to grant of a patent) required in support of this request?

Answer YES if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body;

Otherwise answer NO (See note d)

Patents Form 1/77

Patents Form 1/77

9. Accompanying documents: A patent application must include a description of the invention. Not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form

Description 14

Claims(s)

Abstract

Drawing(s) 5

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)Request for preliminary examination and search (*Patents Form 9/77*)Request for substantive examination (*Patents Form 10/77*)Any other documents
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature(s)

MAGUIRE BOSS

Date: 19.01.04

12. Name, daytime telephone number and e-mail address, if any, of person to contact in the United Kingdom

P.J. EVENS

Tel: 01480 301588

e-Mail: patents@maguires.co.uk

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'YES' in part 8, Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under section 8(3), 12(6) or 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier UK application, you should also complete part 6 with the priority details.

[DUPLICATE]

1

5

TITLE: IMPROVED KEEL

10

DESCRIPTION

The present invention relates generally to a waterborne vessel having an improved keel, and 15 particularly, but not exclusively, to a sailing vessel having an improved keel.

Fin keels (e.g. comprising a single fin supporting a ballast bulb) are well known in the art as a means of providing lateral stability to conventional sailing 20 vessels. However, there are a number of problems associated with fin keels. For example, fin keels are structurally vulnerable to impacts and dynamic loads, with flexure of a fin keel having the potential to cause substantial damage thereto, particularly if cyclically 25 applied loads (e.g. due to waves) are close to the natural frequency of the keel. Furthermore, efficient fin keels require a deep draught to ensure an adequate lifting efficiency. High aspect ratio fins suffer from a low

stalling angle which can lead to control problems in rough conditions, and in the worst cases can lead to regular loss of control of a vessel. In contrast, shorter (i.e. shallow draught) keels may be strong, but deliver poor upwind performance due to increased vortex drag.

A common solution to the problems relating to fin keels is to use a twin keel arrangement in which two shallow-draught fin keels are used instead one deep draft keel. Generally, the two keels are splayed outwards and provided with a small amount of "toe in" such that when a vessel is heeled, the leeward keel becomes more upright and is angled to best resist leeway. However, once in this orientation, the weather keel acts to increase heel, and both keels will produce substantial vortex drag. Although it is possible to design a hull for a twin keel arrangement such that the weather keel generates reduced force with increased heel, this is generally at the cost of hull performance. Furthermore, when sailing upright (e.g. downwind), both keels produce a counter-rotating vortex pair which also carries a significant drag penalty.

Another attempt at addressing some of the problems relating to fin keels is disclosed in GB 2177353 (Rennie), in which a keel is shown which comprises a pair of streamlined side foils depending (e.g. extending) symmetrically from lateral sides of a hull, the side foils converging to a junction below a centre-line of the hull to form an enclosed flow path for allowing water to pass through the keel. The purpose of this arrangement is

primarily concerned with the provision of a keel which is efficient in operation, namely by seeking to reduce induced drag experienced by the keel. Accordingly, the present applicants have identified the need for a sailing vessel 5 having an improved keel which overcomes, or at least alleviates, some of the problems associated with conventional keel arrangements.

In accordance with the present invention there is provided a vessel for travelling on water, comprising a 10 hull means and a keel comprising a member depending from the hull means, the member comprising two limbs each depending from a respective lateral side of the hull means, the two limbs defining at least in part an enclosed flow path extending in a bow to stern direction, the enclosed 15 flow path being configured to allow water incident on the vessel to flow over inner and outer surfaces of the limbs, characterised in that the limbs each have a zero-lift surface which is angled to generate in use a component of hydrodynamic force directed away from the enclosed flow 20 path.

In this way, a keel with an enclosed flow path (or "loop keel" defining a "loop") is provided which, when submerged in water in use, may result in a closed loop of hydrodynamic force, all directed away from (the centre of) 25 the enclosed closed flow path. This situation is equivalent to a vortex ring in a continuous flow and, unless an overall lateral force is being generated on the loop keel, should not result in substantial vorticity being

shed by the loop keel.

In use, the angling of the zero-lift surface to generate an outward force may vary the degree by which the flow within the equivalent vortex ring is accelerated; this 5 may manifest itself as an increase in the apparent inertia of the vessel (known in aerodynamics as the "added mass effect"). This inertia travels with the vortex ring and is experienced by the vessel as a significant increase in longitudinal and roll inertia, a small increase in yaw and 10 pitch inertia, and some increase in heave and lateral inertia. This may have the effect of reducing the violence of the vessel's response to waves and other upsets.

In use, if the vessel should experience a significant heel angle such that part of one limb is partially clear 15 of, and above the water surface, the other, lowest limb, by virtue of the angling of the zero-lift surface, generates a righting moment (assuming forward motion of the vessel is present). At lower angles of heel, the forces on the limbs of the loop will tend to force water 20 to fill or partially fill the loop even when the loop is partially above the water surface. This manifestation of the added mass effect also now forms an additional dynamic ballast element in that the water within the loop that has been raised above the static waterline is now providing a 25 weight-derived righting moment acting directly on the keel members. Any roll disturbance of the keel under forward motion may therefore generate a substantial righting moment.

At least one limb of the loop keel member may comprise a portion having a symmetrical aerofoil cross-section (for example, at least one limb may comprise a cross-section similar to a conventional fin keel), in which case, the portion will be aligned so that water will be incident on the inner surface of the limb so as to generate force away from the loop. In another form, at least one limb of the loop keel member may be cambered (for example, at least one limb may comprise an asymmetric foil section) to provide force generation away from the centre of the loop. In yet another form, the angle of the zero-lift surface of at least one limb may be variable. For example, at least one limb may be of variable camber (e.g. at least one limb may comprise a moveable flap) or a portion of at least one limb may be moveable (e.g. rotatable). For example, the loop keel may comprise a trailing- or leading-edge flap or both, or the loop keel may comprise one or more moveable limbs. In this way, the limbs may be angled so as to generate a continuous outward force all around the loop.

If the limbs of the keel are provided with a means to vary the angle of the zero-lift surface, e.g. by means of flaps or rotation of key parts of the limbs about their longitudinal axes, the apparent inertia of the entire vessel may be varied at will. This effect may be used to trade longitudinal momentum between the vessel and surrounding water with only minimal losses. This would allow a vessel so equipped to transiently slow down and speed up without any significant variation in power input.

One possible use may be for collision avoidance in racing situations where this could be used as a lossless brake. Furthermore, this effect may be of considerable use in the field of racing since, if a boat arrived at a start line for a race a couple of seconds early, some of the kinetic energy of the boat could be temporarily transferred to the water and then recovered after the starting gun had fired.

The two limbs may each comprise a substantially straight portion. For example, the member may comprise a pair of substantially straight limbs connected together to form a V-shape (when viewed from the bow or stern of the sailing vessel) with a portion of the hull means completing the loop to form the enclosed flow path. In another form, the two limbs may be substantially curved.

The two limbs may be symmetrically disposed on either side of a central, longitudinal axis of the hull means. The loop keel may be similarly symmetrical. The two limbs of the loop keel may be connected together direct or, for example, via a ballast bulb.

For improved hydrodynamic performance, the two limbs may be directed (e.g. curved) inwards toward the hull means where they depend from the hull means. For example, the two limbs may be substantially perpendicular to the hull means at the point where they meet the hull means, with the objective of minimising interference drag between the loop keel and the hull means, and to encourage the loop to break the water surface during significant heeling. It may also be desirable to locally increase the chord and reduce the

7
camber where the limbs meet the hull means to reduce the curvature experienced by the longitudinal flow at the waterline. In this way, wave drag may be reduced when the vessel is more or less upright.

5 The vessel may be a sailing vessel (i.e. intended to be propelled using at least one sail). However, the present invention is also applicable to non-sailing vessels (i.e. vessels not employing a sail, e.g. fishing vessels, survey craft or ferries); the inertia effects the vortex
10 ring and dynamic righting moment that is generated by the loop keel may be of great use in such vessels. The righting moment generated by the loop keel will tend to maintain the hull in a substantially upright position in the water (e.g. force the vertical axis of the hull to
15 remain substantially normal to the water surface) as long as the vessel is in forward motion, and has clear benefits in terms of ride comfort and seaworthiness for any vessel.

The hull means may be a monohull or, alternatively, the hull means may comprise a multi-hull arrangement,
20 provided that there is a hydrodynamic surface to form the loop.

The keel may further comprise a ballast portion. For example, the loop keel may comprise a ballast bulb disposed at a lowest part of the keel (e.g. at the apex of a V-
25 shaped loop keel). Alternatively, or in addition, the loop keel may further comprise a substantially planar, horizontal element disposed at a lowest part of the loop keel member, and containing ballast. The substantially

planar surface may be configured to support the sailing vessel when grounded, e.g. between tides. At the base of the loop keel, the two limbs may be angled (e.g. curved) to smoothly meet the ballast bulb. However, many of the advantages of the present invention are also applicable for an unballasted keel.

An embodiment of the present invention will now be described by way of example with reference to the accompanying drawings in which:

10 Figure 1 shows a schematic perspective view of an underside of a sailing vessel embodying the present invention;

Figure 2 shows a force diagram representing the vortex ring produced by the loop keel of the sailing vessel shown in Figure 1;

Figure 3 shows a split schematic front/rear view of the sailing vessel of Figure 1;

Figure 4A shows a schematic side view of the sailing vessel of Figure 1;

20 Figure 4B shows a schematic plan view of one half of the sailing vessel of Figure 1;

Figure 5 shows the sailing vessel of Figure 1 compared with a conventional fin keel sailing vessel in a heeling position;

25 Figure 6 shows a schematic representation of the sailing vessel of Figure 1 and the convention single heel sailing vessel of Figure 5 in a cross-flow;

Figure 7A shows a graph illustrating the concept of

9

the zero lift surface;

Figure 7B shows a cross-sectional diagram of a cambered aerofoil; and

Figure 7C shows a cross-sectional diagram of an uncambered aerofoil.

Figures 1, 3, 4A and 4B show a sailing vessel 10 comprising a hull 20 and a loop keel 30, the loop keel 30 comprising a substantially V-shaped looped keel member 34 attached to the hull 20 at two laterally spaced locations 10 38,39. The looped keel member 34 comprises a pair of limbs 44, each having substantially straight fin-like portions 45 which are attached at one end to a central ballast bulb 42, and curved, upper portions 46 which attach the loop keel to the hull 20 at the two laterally 15 spaced locations 38,39. The pair of limbs 44 in combination with the hull 20, form an enclosed flow path (a "loop" or aperture) 40 through which water may pass.

The limbs 44 comprise inner and outer surfaces (44a,44b) which are configured so as to generate a 20 continuous outwards force all around the loop (this is directly equivalent to a vortex ring in a continuous flow). For example, fin-like portions 45 may have a cambered or uncambered foil profile having a zero lift surface which is angled to generate a component of 25 hydrodynamic force directed away from the enclosed flow path 40 when the loop keel 30 passes through incident water. Additionally, the pair of limbs 44 may include one or more moveable flap (not shown) to control apparent

10

inertia of the sailing vessel 10. Figure 2 shows schematically the equivalent vortex ring produced by the loop keel 30 when zero overall lateral force is applied thereto.

5 Figure 5 shows various forces acting on the sailing vessel 10 in a heeled position as compared with the forces acting on a conventional sailing vessel 50 comprising a fin keel 52. Whereas all the dynamic forces shown acting on the fin keel 52 act to increase the heeling moment, all 10 of the dynamic forces shown acting on the loop keel 30 act to reduce the heeling moment. The ballast effect for both keels is similar.

Figure 6 shows the conventional fin keel 52 and the loop keel 30 in a cross flow. With a conventional fin 15 keel, any cross-flow results in a sudden increase in incidence. In contrast, cross-flow results in a component of flow along the limbs 44. When coupled with fore and aft flow, this acts to reduce the local incidence change, and thereby provides improved stall resistance. The 20 advantages of the present invention may be explained as follows. When the rig of the sailing vessel is loaded, the effect is to both load the loop keel laterally to resist the rig load and to generate a heeling moment to leeward. The effect of this on the loop keel is to cause the weather 25 limb of the loop keel to become more upright and also, depending on the particular design, to break the water surface and thus disturb the equivalent vortex ring of the unloaded keel. As this limb is angled to generate force

11

away from the centre of the loop, it is ideally placed to generate an efficient leeway resisting force, this force is also generated without requiring the hull to crab as with a conventional fixed fin and this can be used to reduce the heeled hull drag. It also has a further advantage over a fin keel in this condition, since the other limb of the keel (the leeward limb) still provides surface continuity and acts in the same manner as an aircraft winglet increasing the effective aspect ratio of the keel and thus reducing the vortex drag. The leeward limb generates a force both downward and to a lesser degree to leeward. The hull, due to the heeling angle, also moves the centre of buoyancy to leeward (form stability) and the force from the leeward keel limb is offset from the centre of buoyancy to weather, this results in a dynamic righting moment. The overall result is that a loop keel equipped yacht should sail to windward with less drag and less heel than a similar yacht equipped with a fin keel.

Yet a further advantage of the loop keel is that the limbs of the keel will always offer some element of the working keel surface to the water flow at a lateral angle, which will tend to cause a degree of cross flow which has the effect of increasing resistance to stalling. The keel will thus generate lift to high angles of attack and be highly resistant to stall in rough conditions. The loop keel is also of a naturally sturdy and stiff structural form and is very unlikely to suffer from elastically induced dynamic overloads.

12

If two otherwise similar sailing vessels are equipped with a fin keel and a competing loop keel of similar draught, the loop keeled vessel will sail downwind with a similar performance to the fin-keeled vessel. However, as soon as the course is such as to place a lateral load on the keel, the loop keeled vessel will sail faster, with less heel and thus a correspondingly more efficient rig, and will be more controllably in extreme conditions. It will also be significantly stronger. If the performance of the two vessels is matched, the loop keeled vessel will have a lower draught than the fin keeled vessel; this reduction in draught is likely to be of the order of 20% to 30%.

13

ANNEX

The graph of Figure 7A illustrates the concept of the zero lift surface for a cambered (i.e. asymmetric) aerofoil and an uncambered (symmetrical) aerofoil, as illustrated in 5 Figures 7B and 7C respectively. The graph shows a plot of the lift coefficient (C_L) versus the incidence in degrees for both the aerofoils.

The cross-section of the cambered aerofoil has two lines superimposed on it, one of which is the geometric 10 datum of the foil section (i.e., the line about which the aerofoil co-ordinates are defined for plotting purposes), the other of which represents the zero lift line for this aerofoil. It should be noted that the zero lift line relates to a 2 dimensional aerofoil section. When this is 15 related to a real foil surface the zero lift lines of every local aerofoil section merge together to form the zero lift surface. This may be planar but in the case of a non-planar foil this need not be the case.

As shown, at an angle of incidence of zero degrees, 20 the cambered aerofoil will generate positive lift. However, at an angle of approximately minus two degrees the lift generated is zero. This means that to generate zero lift the cambered aerofoil must be set at an angle to the flow of about minus two degrees and this flow datum is 25 shown on the cross-section of the cambered aerofoil as the zero lift line.



The lift slope for the uncambered aerofoil is also shown on the graph. In contrast to the cambered aerofoil,

14

this arrangement produces zero lift at an incidence of zero degrees. In this case, and for any symmetrical section or form including flat plates and bluff bodies, the zero lift line coincides with the axis of symmetry of the body or foil.

The lift gradient with incidence of both the symmetrical and cambered forms is similar. The corollary of this is that over the approximately linear range of foil behaviour the lift is directly proportional to the incidence of the zero lift line relative to the undisturbed fluid flow axis (i.e., the flow axis of the fluid in the absence of the foil).


15

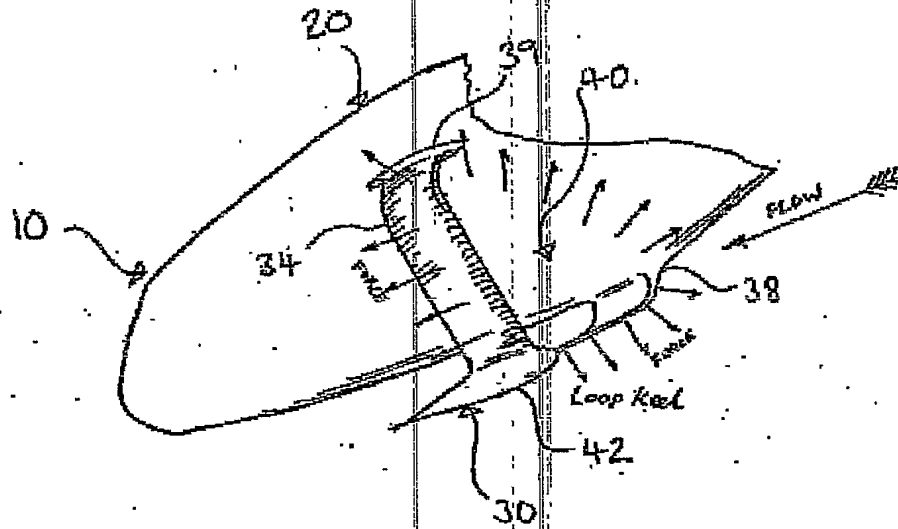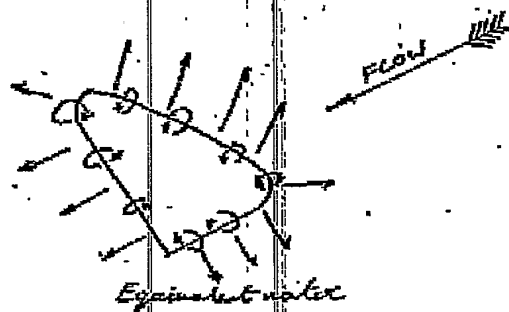FIGURE 1FIGURE 2



—

2/5

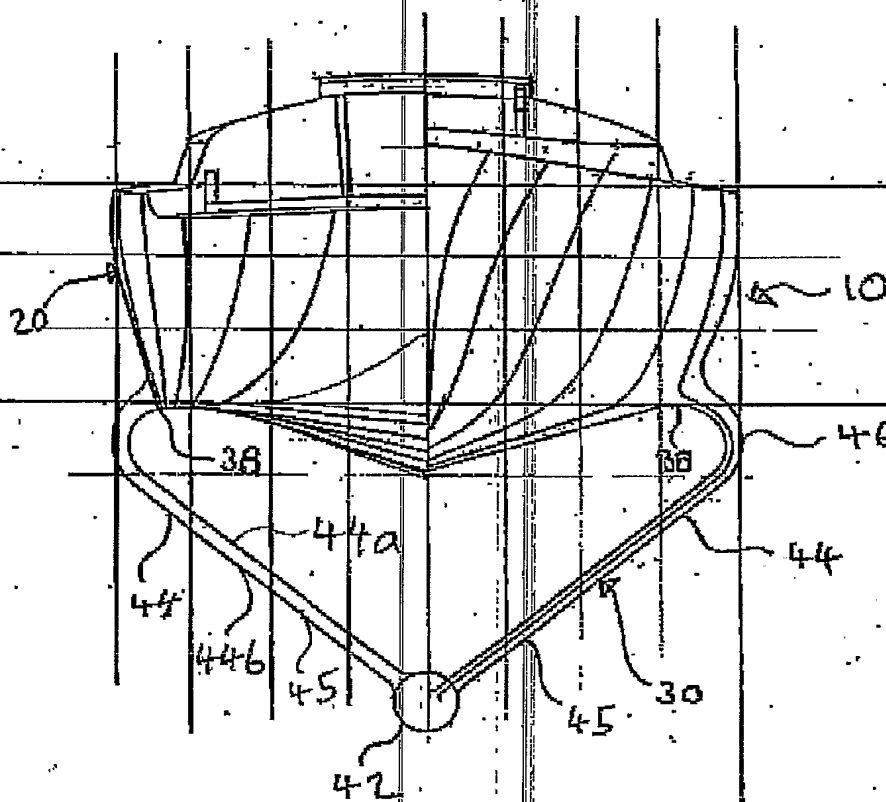FIGURE 3



3/5

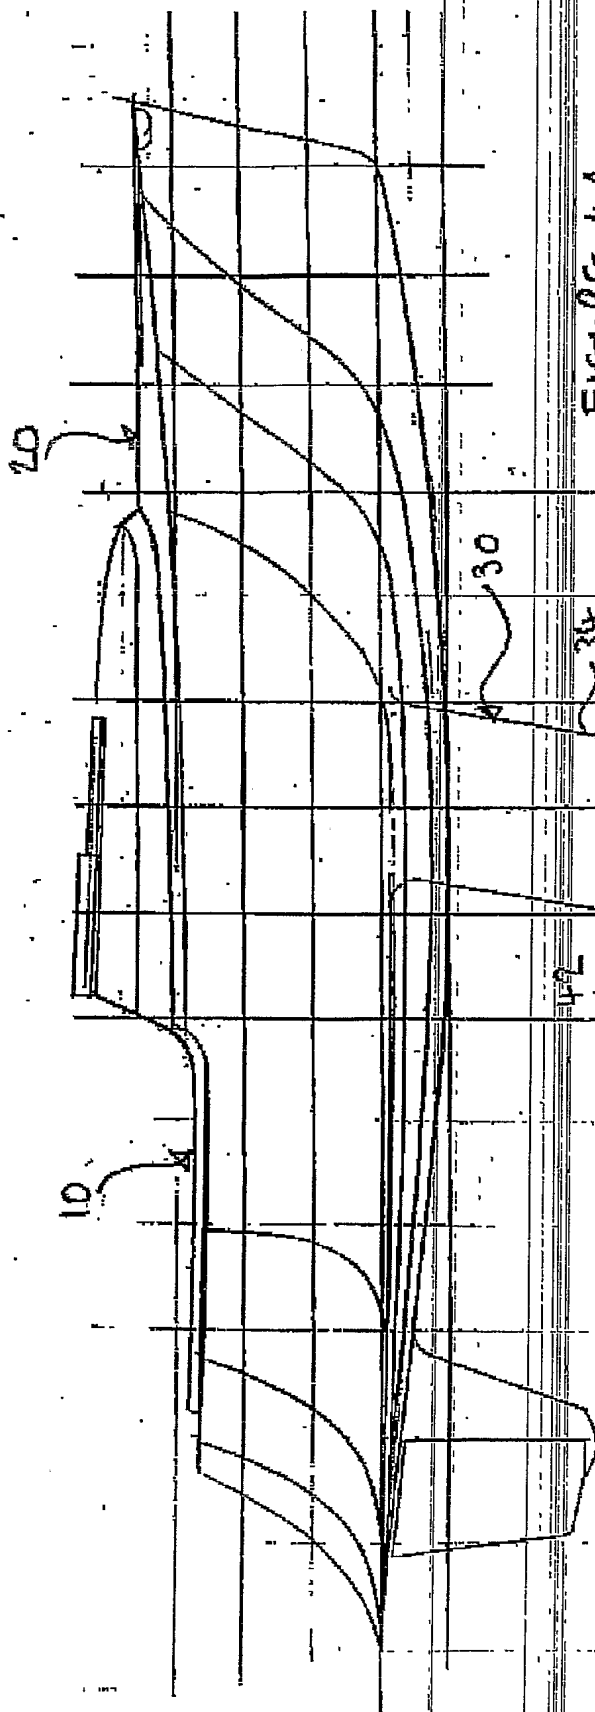


FIGURE 4A

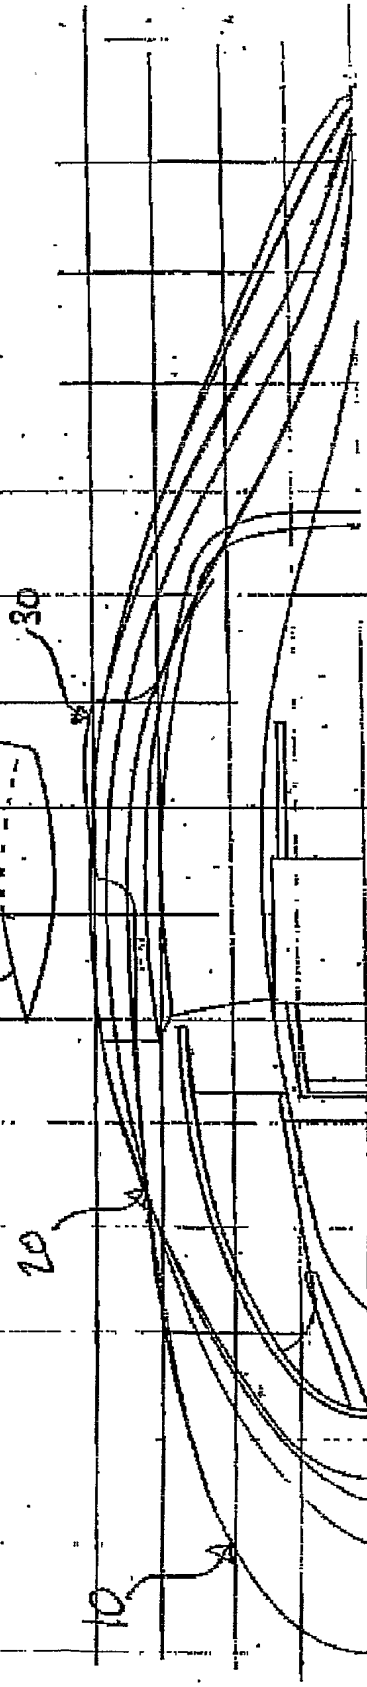


FIGURE 4B



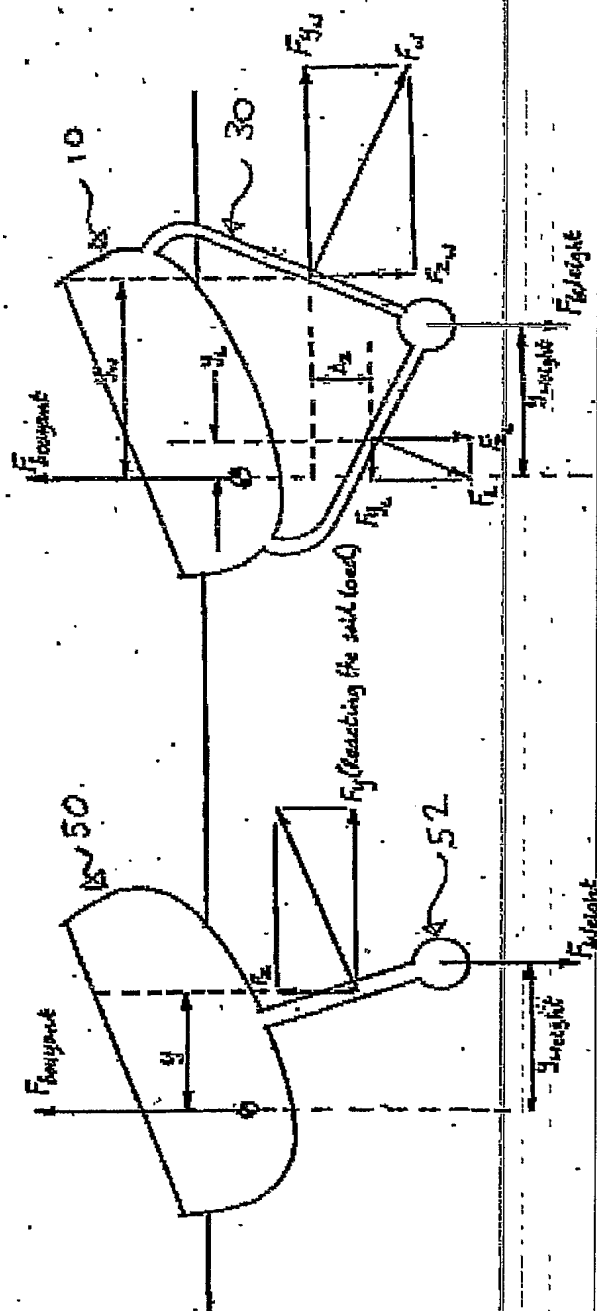


FIGURE 5





5/5

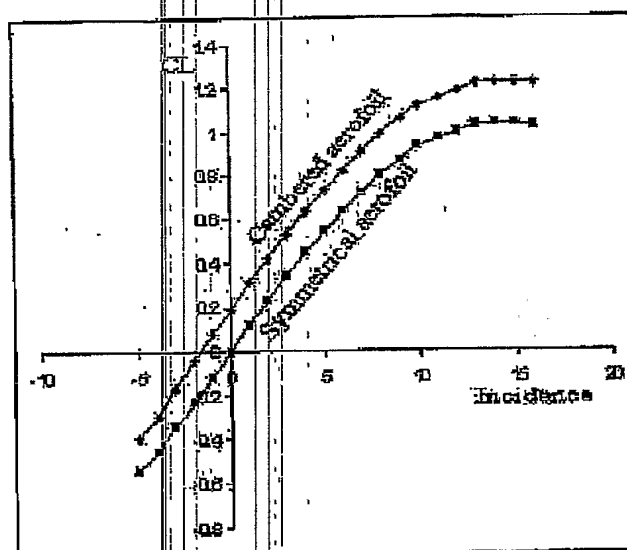


FIGURE 7A



FIGURE 7B



FIGURE 7C



Handwritten scribbles or marks, possibly illegible text or a signature, located in the middle left area of the page.